

AI Bridge






AB1A-4A1 / AB2A-8A1

Features

- AI Sever
- Face
- RetailTrend
- Smoke & Fire



Dimension (mm)

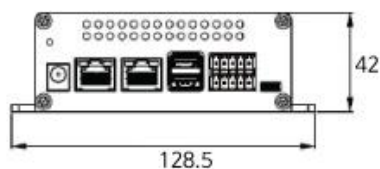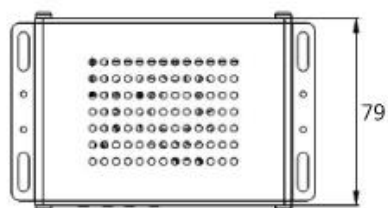

Specification

시스템		
모델	AB1A-4A1	AB2A-8A1
Core Module	Orin Nano 4GB	Orin Nano 8GB
SSD (M.2 NVMe)	500GB	500GB
네트워크	Gigabit Ethernet	
파워	DC12V/5A (1 x DC power jack)	
동작온도	0°C to +50°C(32°F to 122°F)	
동작습도	20% ~ 85% RH	
인증	CE, UKCA, FCC, UL	
NDAA	Compliant	
색상 & 재질	Black/Silver & Metal	
크기	128.5mm(W) x 42mm(H) x 79mm(D)	
무게	Approx. 350g	
외부포트		
USB	2 x USB 3.1 Gen (Type-A)	
HDMI	1 x micro HDMI	
DI / DO	2 x Alarm In / 2 x Alarm Out	
네트워크	2 x RJ-45	
AI 서버		
비디오 입력 : 6fps@640x480		
DLOT	8 channels	12 channels
DLPT	8 channels	12 channels
DLST	8 channels	12 channels
DLFT	6 channels	12 channels
DLTT	8 channels	12 channels
비디오 입력 : 12fps@640x480		
DLOT	4 channels	8 channels
DLPT	4 channels	8 channels
DLST	4 channels	8 channels
DLFT	4 channels	6 channels
DLTT	4 channels	8 channels
HOIT	4 channels	8 channels
Fall	3 channels	4 channels
Fight	2 channels	4 channels
Fall + Fight	1 channels	3 channels

악세서리 (PPE)	1 channels	3 channels
비디오 입력 : 15fps@640x480		
Smoke & Fire		3 channels
DLOT/DLPT + Smoke & Fire		4 channels + 1channels

리테일트렌드		
비디오 입력 : 6fps@640x480		
리테일트렌드		12 channels