

# 5M HD Analog IR Indoor Dome

CVP2-25-R

## Features


---

- Analog High Definition Universal over Coax Technology
- Sens-up Super Low Light Technology
- 1/2.8" CMOS Sensor
- Max 1944P Resolution at 12.5/20fps
- Wide Dynamic Range (WDR)
- MFZ P-Iris Lens from 2.7~13.5mm
- Smart IR™ with Intelligent Camera Sync. 100ft Range
- Smart DNR™ 3D Digital Noise Reduction
- Highlight Masking Exposure (HME)
- True Day/Night Mechanical IR Cut Filter
- Programmable Privacy Zones
- Auto Gain Control (AGC)
- Back Light Compensation (BLC)
- Dynamic Range Compressor (DRC) Reveals Low Light Detail
- Auto White Balance (AWB)
- OSD Control via Coax Cable using UTC
- RS485



## Dimension (mm)

---

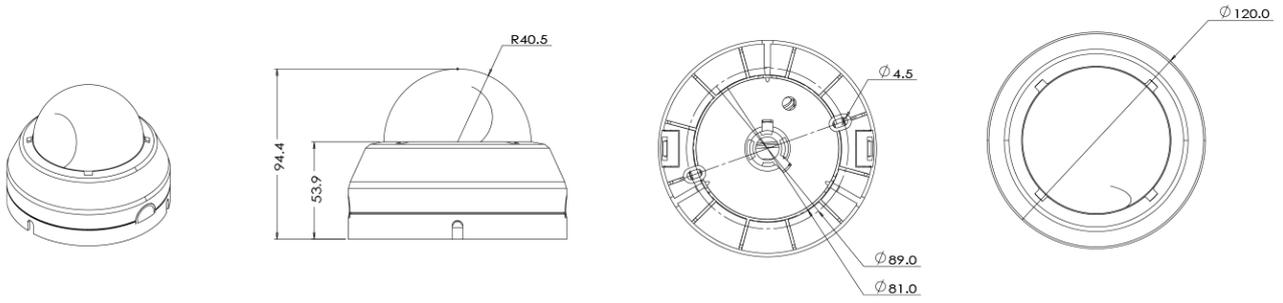

## Specification

### Video

Image Sensor	1/2.8" 5M CMOS
Num of Channels	1
Total Pixel	2704(H) x 2104(V)
Active Pixel	2608(H) x 1960(V)
Max Resolution	2592 x 1944
MIN. Illumination	Color(at Day) : 0.08Lux (F1.4, 30IRE) B/W(at Night) : 0 lux(With IR)
Video Output	AHD or TVI or CVI or CVBS
Only installer Video Output	CVBS
Signal Technology	Max 5M Megapixel Universal
Synchronization	Internal
Scanning Mode	Progressive Scan

### Lens

Focal Length	2.7~13.5mm
Aperture	F1.4
Lens Type	Vari-Focal
IRIS Type	P-IRIS
Horizontal Angle	D:136°, H:102.2°, V:73.9°(Wide) D:40.5°, H:31.4°, V:23.3°(Tele)

### Operational

Shutter Speed	1/30(25) - 1/30,000 Slow Shutter (OFF-x32)
Auto Gain Control (AGC)	Yes
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	2D/3D DNR
Wide Dynamic Range (WDR)	Double Scan WDR
Dynamic Range	120dB or above
LEDs	24IR
LED Distance	100ft
Gamma	0.5
Function	Motion Detection Privacy Zone White Balance Backlight Mirror & Flip

### I/O & EVENT

Audio In / Out	No
Alarm In / Out	0/1

I/O & EVENT

RS485	PELCO D
UTC Built-in	UTC
UTP Built-in	No

Electrical

Power Requirement	DC12V / AC24V Dual Voltage DC12V AC24V
Power consumption	DC(LED OFF) :3.3W (275mA) DC(LED ON) : 5.9W (495mA) AC(LED OFF) :2.75W (200mA) AC(LED ON) :5.3W (360mA)

Environmental

Operating Temperature	-20°C ~ 50°C
Cold Start	No
Operating Humidity	Less than 90%(Non-Condensing)
IK Rating	No
IP Rating	No
Other Certification	FCC CE ROHS

Mechanical

Housing Model	VP2
Housing	Indoor Dome
Material	Plastic
Color	White
Dimensions (W x D x H)	120mm 89.4mm
Weight	0.23

Compatible Accessories



**GP02**  
Gang Bracket