

AI 4K IP MFZ IR Speaker Flashlight


NST17-78-RA(622)

Features

- 4K AI Speaker Strobe Light Camera
- Supports Intelligent Video Analysis Events (Line Crossing/Intrusion/Queue Management..)
- Maximum Resolution 3840 (H) X 2160 (V) / 30fps
- Horizontal Field of View 49.3 degrees (Wide) ~ 18.1 degrees (Zoom) / 3.6x Optical Zoom
- Day & Night(ICR)/IR Visibility up to 40 meters
- Backlight Compensation (WDR)
- SD/SDHC/SDXC Memory Slot
- PoE IEEE 802.3bt/Class6
- IP66/IK10
- Built-in Microphone/Speaker 14W(Siren) & (Sound) W+B+R+G Alarm Lamp



Dimension (mm)

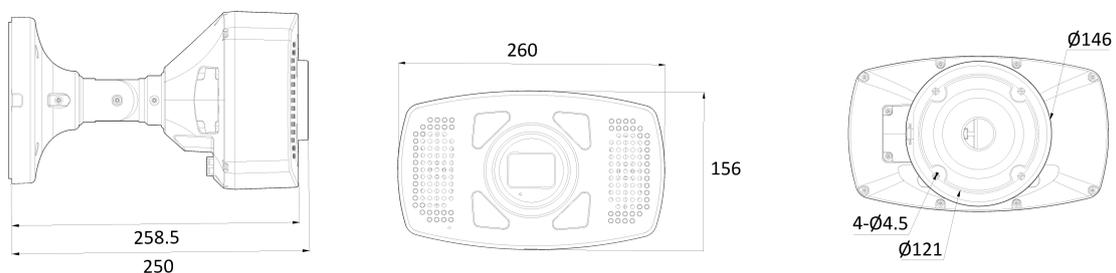

Specification

Video

| | |
|-----------------------------|------------------------------------|
| Image Sensor | 1/2.8" 8.6M CMOS |
| Channels | 1 |
| Total Pixel | 3864(H) X 2228(V) |
| Max Resolution | 3840(H) X 2160(V) |
| MIN. Illumination | COLOR: 0.12Lux BW: 0Lux with IR |
| Only installer Video Output | 1 [CVBS 1.0V p-p (75Ω)] |
| S/N(signal/noise) Ratio | 50dB |
| Scanning Mode | Progressive Scan |

Lens

| | |
|-------------------|---|
| Focal Length | 6~22mm |
| Aperture | F1.6 |
| Lens Type | Motorized_Varifocal |
| IRIS Type | P-IRIS |
| Horizontal Angle | D:20.7°~50.8°, H:18.1°~49.3°, V:10.2°~24.3° |
| Pan / Tilt / Zoom | Zoom :X3.6 Optical |

Operational

| | |
|--------------------------|---|
| Shutter Speed | Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10) |
| Auto Gain Control (AGC) | Auto |
| Day & Night | TDN (True Day & Night) |
| Digital Noise Reduction | 3D DNR |
| Wide Dynamic Range (WDR) | WDR(2x) |
| Dynamic Range | 120dB or above |
| LEDs | Front H6IR/H6W.R.G.B, Rear H6W.R.G.B |
| LED Distance | 130ft(40m) |
| Privacy Zone | Yes |
| Function | Motion-Detection Mirror&Flip |

Intelligent Video Analytic

| | |
|-------------------------------|---|
| AI Intelligent Video Analytic | Yes |
| Video analytics | Intrusion Detection Zones&lines Tamper Detection Appear Filter Disappear Filter Dwell Filter Enter Filter Exit Filter Stopped Filter Counting Counting Lines Object Color Direction Filter Logical Rules Tailgating Filter DL People Tracker DL Object Tracker Metadata |

Encoder (video & audio)

| | |
|--|---|
| Video Compression | H.264 H.265 MJPEG |
| Support Resolution | H.265 : 3840x2160/2592x1944/2560x1440/1920x1080/1280x720/640x480/640x360/352x288/352x240 H.264 : 3840x2160/2592x1944/2560x1440/1920x1080/1280x720/640x480/640x360/352x288/352x240 MJPEG : 1920x1080/1280x720/800x600/768x432/704x576/704x480/640x480/640x360/352x288/352x240 |
| Intelligent Codec | Yes |
| Multiple Profile Streaming Performance | Triple Streaming(3rd Only MJPEG) |
| Video BitRate | 100Kbps~25Mbps |
| Bitrate Control | Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth) |
| Video Bitrate extra comment | Multi-rate for Preview and Recording |
| Audio Compression | G.711 ulaw |
| Special Feature | Dynamic ROI(Region of Interest) |

I/O & Event

| | |
|--------------------|---|
| Audio In / Out | Choose MIC or 1 Line Input[1.0Vrms, 3K ohm] / 1 Line Output & Speaker |
| Alarm In / Out | 1 Line/1 Line |
| Mic | Yes |
| Event Trigger | Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection |
| Event Notification | FTP E-Mail Alarm Out SD Card Siren Flashlight |

Network

| | |
|-----------------------------|--|
| Ethernet | RJ45(1000Base-T(1Gbps)) |
| Protocol | TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF |
| Security | HTTPS(SSL) IP filtering 802.1x |
| Application Programming I/F | CGI API ONVIF |
| Web viewer | MS Edge® Google Chrome® |
| Support languages | English Korean Japanese |
| Edge storage | Micro SD Micro SDHC Micro SDXC |
| SD Card Socket | 1 |

Electrical

| | |
|-------------------|---|
| Power Requirement | Adaptor is not included DC12V PoE IEEE 802.3bt Class6 |
| Power consumption | DC Max: 36.0W(3.0A) PoE Max: 46.4W(860mA) |

Environmental

Environmental

| | |
|-----------------------|---------------------------|
| Operating Temperature | -20°C ~ 50°C |
| Cold Start | No |
| Operating Humidity | 10-90% RH(Non-Condensing) |
| Vandal Proof Casing | IK10 |
| IP Rating | IP66 |
| Other Certification | FCC CE ROHS |

Mechanical

| | |
|------------------------|-------------------------|
| Housing Model | ST17 |
| Housing | Outdoor Specialty |
| Material | Aluminum-Die Casting |
| Color | Dark Gray |
| Dimensions (W x D x H) | 260mm 259mm 156mm |
| Weight | 3.7kg |