CPRO
DIGITAL SURVEILLANCE SYSTEMS

AI 5M IP Repositioning IR PTZ Flat Dome


NPX10-75L-R

Features

- 5MP AI Repositioning PTZ Camera
- Supports Intelligent Video Analysis Events (Line Crossing, Intrusion, Queue Management, etc.)
- Maximum Resolution 2592 (H) X 1944 (V) / 30fps
- Horizontal Field of View 96degrees (Wide) ~ 32degrees (Zoom) / 4.1x Optical Zoom
- Day & Night(ICR)/IR Visibility up to 22 meters
- Backlight Compensation (WDR)
- SD/SDHC/SDXC Memory Slot
- PoE IEEE 802.3af/Class3
- Built-in Microphone/Speaker



Dimension (mm)

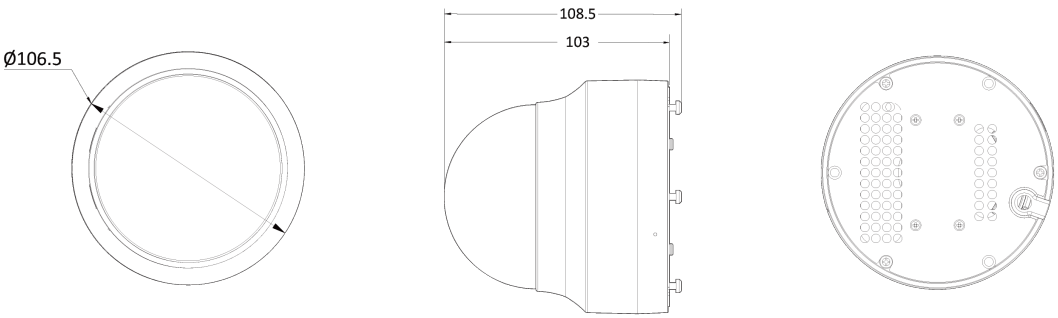

CPRO
DIGITAL SURVEILLANCE SYSTEMS

Specification

Video	
Image Sensor	1/2.8” 5.17M(STV2) CMOS
Channels	1
Total Pixel	2608(H) X 1984(V)
Max Resolution	2592(H) X 1944(V)
MIN. Illumination	COLOR: 0.03Lux BW: 0Lux with IR
Only installer Video Output	1 [CVBS 1.0V p-p (75Ω)]
S/N(signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan

Lens	
Focal Length	3.3~13.5mm
Aperture	F1.3
Lens Type	Motorized_Varifocal
IRIS Type	P-IRIS
Horizontal Angle	D:40°~123.0°, H:32°~96°, V:24°~69°
Pan / Tilt / Zoom	Pan:340° Tilt :90° Zoom :4.1X Optical

Operational	
Shutter Speed	Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10)
Auto Gain Control (AGC)	Auto
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range (WDR)	WDR(2x)
Dynamic Range	120dB or above
LEDs	H3IR
LED Distance	70ft(22m)
Privacy Zone	Yes
Function	Motion-Detection LDC Mirror&Flip Auto White Balance

Intelligent Video Analytic	
AI Intelligent Video Analytic	Yes

CPRO
DIGITAL SURVEILLANCE SYSTEMS

Intelligent Video Analytic	
Video analytics	Intrusion Detection Zones&lines Tamper Detection Appear Filter Disappear Filter Dwell Filter Enter Filter Exit Filter Stopped Filter Counting Counting Lines Object Color Direction Filter Logical Rules Tailgating Filter DL People Tracker DL Object Tracker Metadata

Encoder (video & audio)	
Video Compression	H.264 H.265 MJPEG
Support Resolution	H.265 : 2592x1944/2560x1440/1920x1080/1280x720/800x600/704x576/704x480/640x480/640x360/352x288/352x240 H.264 : 2592x1944/2560x1440/1920x1080/1280x720/800x600/704x576/704x480/640x480/640x360/352x288/352x240 MJPEG : 1920x1080/1280x720/800x600/768x432/704x576/704x480/640x480/640x360/352x288/352x240
Intelligent Codec	Yes
Multiple Profile Streaming Performance	Triple Streaming(3rd Only MJPEG)
Video BitRate	100Kbps~25Mbps
Bitrate Control	Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth)
Video Bitrate extra comment	Multi-rate for Preview and Recording
Audio Compression	G.711 ulaw
Special Feature	Dynamic ROI(Region of Interest)

I/O & Event	
Audio In / Out	Mic / Speaker
Alarm In / Out	No
Mic	Yes
Event Trigger	Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection
Event Notification	FTP E-Mail SD Card

Network	
Ethernet	RJ45 (10/100Base-T)
Protocol	TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF
Security	HTTPS(SSL) IP filtering 802.1x
Application Programming I/F	CGI API ONVIF
Web viewer	MS Edge® Google Chrome®
Support languages	English Korean Japanese Vietnamese
Edge storage	Micro SD Micro SDHC Micro SDXC
SD Card Socket	1

CPRO
DIGITAL SURVEILLANCE SYSTEMS

Electrical	
Power Requirement	Adaptor is not included DC12V PoE IEEE 802.3af Class3
Power consumption	DC Max: 11.6W PoE Max: 13.4W

Environmental	
Operating Temperature	-20℃ ~ 50℃
Cold Start	No
Operating Humidity	10-90% RH(Non-Condensing)
Vandal Proof Casing	No
IP Rating	No
Other Certification	FCC CE ROHS

Mechanical	
Housing Model	PX10
Housing	Indoor Dome
Material	Plastic
Color	White
Dimensions (W x D x H)	106.5mm 108.5mm
Weight	0.49kg