

# AI 5M IP IR Flat Dome

NVD7-E5L-R

## Features


---

- 5MP AI Camera
- Supports Intelligent Video Analysis Events (Intrusion, Dwell, Counting Line)
- Maximum Resolution 2592 (H) X 1944 (V) / 30fps
- Horizontal Field of View 97.7 degrees (2.8mm), 76.6 degrees (4.0mm), 52 degrees (6.0mm) / Fixed Lens Options
- Day & Night(ICR)/IR Visibility up to 28 meters
- Backlight Compensation (WDR)
- SD/SDHC/SDXC Memory Slot
- PoE IEEE 802.3af/Class3
- IP67/IK10
- Built-in Microphone



## Dimension (mm)

---

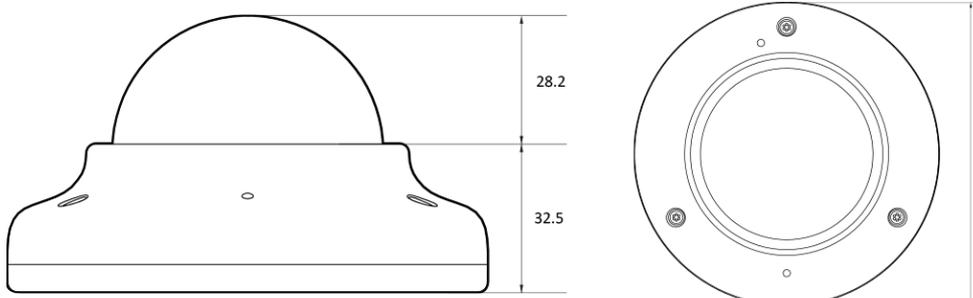

## Specification

### Video

Image Sensor	1/2.8" 5.17M(STV2) CMOS
Channels	1
Total Pixel	2608(H) X 1984(V)
Max Resolution	2592(H) X 1944(V)
MIN. Illumination	COLOR: 0.08Lux BW: 0Lux with IR
Only installer Video Output	No
S/N(signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan

### Lens

Focal Length	2.8mm 4.0mm 6.0mm
Aperture	2.8 mm, F2.2   4.0mm, F2.0   6.0mm, F2.0
Lens Type	Fixed
IRIS Type	Auto Exposure
Horizontal Angle	D : 121.8°, H : 97.7°, V : 73° (2.8mm) /D : 99°, H : 76.6°, V : 56° (4mm) /D : 69.4°, H : 51.9°, V : 37.6° (6mm)
Pan / Tilt / Zoom	Zoom :Fixed

### Operational

Shutter Speed	Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10)
Auto Gain Control (AGC)	Auto
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range (WDR)	WDR(2x)
Dynamic Range	120dB or above
LEDs	H2IR
LED Distance	90ft(28m)
Privacy Zone	Yes
Function	Motion-Detection Mirror&Flip

### Intelligent Video Analytic

AI Intelligent Video Analytic	Yes
Video analytics	Intrusion Detection Dwell Filter Counting Lines Metadata

Encoder (video & audio)

Video Compression	H.264 H.265 MJPEG
Support Resolution	H.265 : 2592x1944/2560x1440/1920x1080/1280x720/704x480/640x480/640x360/352x240 H.264 : 2592x1944/2560x1440/1920x1080/1280x720/704x480/640x480/640x360/352x240 MJPEG : 1280x720/768x432/704x480/640x480/640x360/352x240
Intelligent Codec	Yes
Multiple Profile Streaming Performance	Triple Streaming(3rd Only MJPEG)
Video BitRate	100Kbps~25Mbps
Bitrate Control	Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth)
Video Bitrate extra comment	Multi-rate for Preview and Recording
Audio Compression	G.711 ulaw
Special Feature	Dynamic ROI(Region of Interest)

I/O & Event

Audio In / Out	Mic /1 Line Output
Alarm In / Out	1 Line/1 Line
Mic	Yes
Event Trigger	Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection
Event Notification	FTP E-Mail Alarm Out SD Card

Network

Ethernet	RJ45 (10/100Base-T)
Protocol	TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF
Security	HTTPS(SSL) IP filtering 802.1x Digest Authentication
Application Programming I/F	CGI API ONVIF
Web viewer	MS Edge® Google Chrome®
Support languages	English Korean Japanese Vietnamese
Edge storage	Micro SD Micro SDHC Micro SDXC
SD Card Socket	1

Electrical

Power Requirement	Adaptor is not included DC12V PoE IEEE 802.3af Class3
Power consumption	DC Max: 5.1W PoE Max: 7.1W

Environmental

Operating Temperature	-30°C ~ 60°C
Cold Start	No

Environmental

Operating Humidity	10-90% RH(Non-Condensing)
Vandal Proof Casing	IK10
IP Rating	IP67
Other Certification	FCC CE ROHS UL

Mechanical

Housing Model	VD7
Housing	Outdoor Dome
Material	Aluminum-Die Casting
Color	White
Dimensions (W x D x H)	105mm 60.7mm
Weight	0.36kg

Compatible Accessories

 <p><b>BJC12</b> JUNCTION BRACKET</p>	 <p><b>BC11 NPT</b></p>	 <p><b>BJC04</b> Junction Bracket</p>	 <p><b>BW11</b> Wall Bracket</p>
 <p><b>BC11</b> Ceiling Bracket</p>	 <p><b>GP02</b> Gang Bracket</p>	 <p><b>BJC09</b> Wall Junction Bracket</p>	 <p><b>BP01</b> Pole Mount Bracket</p>



**BCO01**

Corner Mount Bracket