

# 5M IP IR Fisheye Dome

NVF13-E5L-R

## Features


---

- 5MP 360-degree Fisheye Camera
- Maximum Resolution 2592 (H) X 1944 (V) / 30fps
- Field of View 360 degrees
- Fisheye lens
- Day & Night(ICR)/Night Vision up to 31 meters
- Backlight Compensation (WDR)
- SD/SDHC/SDXC Memory Slot
- PoE IEEE 802.3af/Class3
- IP67/IK10
- Built-in Microphone



## Dimension (mm)

---

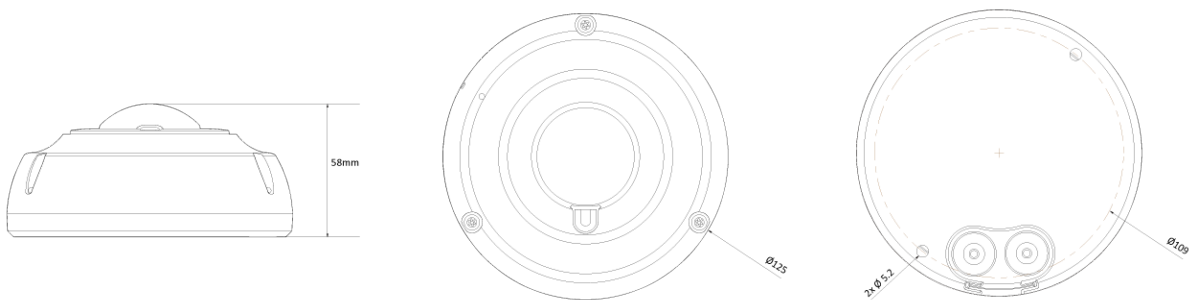

## Specification

### Video

Image Sensor	1/2.8" 5.17M(STV2) CMOS
Channels	1
Total Pixel	2608(H) X 1984(V)
Max Resolution	2592(H) X 1944(V)
MIN. Illumination	COLOR: 0.08Lux BW: 0Lux with IR
Only installer Video Output	1 [CVBS 1.0V p-p (75Ω)]
S/N(signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan

### Lens

Focal Length	1.19mm
Aperture	F2.0
Lens Type	Fixed
IRIS Type	Auto Exposure
Horizontal Angle	D:185°, H:185°, V:185°
Pan / Tilt / Zoom	Zoom :Fixed

### Operational

Shutter Speed	Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10)
Auto Gain Control (AGC)	Auto
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range (WDR)	WDR(2x)
Dynamic Range	120dB or above
LEDs	H3IR
LED Distance	70ft(22m)
Privacy Zone	Yes
Function	Motion-Detection Auto White Balance

### Intelligent Video Analytic

AI Intelligent Video Analytic	No
-------------------------------	----

Encoder (video & audio)

Video Compression	H.264 H.265 MJPEG
Support Resolution	H.265 : 2592x1944/2048x1536/1600x1200/640x480/640x360/384x288/352x240/320x240 H.264 : 2592x1944/2048x1536/1600x1200/640x480/640x360/384x288/352x240/320x240 MJPEG : 640x480/640x360/384x288/320x240
Intelligent Codec	Yes
Multiple Profile Streaming Performance	Triple Streaming(3rd Only MJPEG)
Video BitRate	100Kbps~25Mbps
Bitrate Control	Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth)
Video Bitrate extra comment	Multi-rate for Preview and Recording
Audio Compression	G.711 ulaw
Special Feature	Dynamic ROI(Region of Interest)

I/O & Event

Audio In / Out	Mic /1 Line Output
Alarm In / Out	1 Line/1 Line
Mic	Yes
Event Trigger	Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection
Event Notification	FTP E-Mail Alarm Out SD Card

Network

Ethernet	RJ45 (10/100Base-T)
Protocol	TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF
Security	HTTPS(SSL) IP filtering 802.1x Digest Authentication
Application Programming I/F	CGI API ONVIF
Web viewer	MS Edge® Google Chrome®
Support languages	English Korean Japanese
Edge storage	Micro SD Micro SDHC Micro SDXC
SD Card Socket	1

Electrical

Power Requirement	Adaptor is not included DC12V PoE IEEE 802.3af Class3
Power consumption	DC Max: 6.5W PoE Max: 7.5W

Environmental

Operating Temperature	-30°C ~ 60°C
Cold Start	No








Environmental

Operating Humidity	10-90% RH(Non-Condensing)
Vandal Proof Casing	IK10
IP Rating	IP67
Other Certification	FCC CE ROHS UL

Mechanical

Housing Model	VF13
Housing	Outdoor Dome Fisheye
Material	Aluminum-Die Casting
Color	White
Dimensions (W x D x H)	125mm 58mm
Weight	0.55kg

Compatible Accessories

 <p><b>BJC11</b> JUNCTION BRACKET</p>	 <p><b>BC10 NPT</b></p>	 <p><b>BJC08</b> Angle Bracket</p>	 <p><b>GP02</b> Gang Bracket</p>
 <p><b>BJC03</b> Junction Bracket</p>	 <p><b>BW10</b> Wall Bracket</p>	 <p><b>BC10</b> Ceiling Bracket</p>	