

# 4K IP IR Flat Dome

NVD13-58-R\_Fixed

## Features


---

- 4K camera
- Maximum resolution 3840 (horizontal) X 2160 (vertical) / 30fps
- Horizontal field of view 105 degrees (2.8mm), 86 degrees (4.0mm), 55 degrees (6.0mm) / Fixed lens selection
- Day & Night (ICR) / IR reach distance 22 meters
- Backlight compensation (WDR)
- SD/SDHC/SDXC memory slot
- PoE IEEE 802.3af/Class3
- IP67/IK10



## Dimension (mm)

---

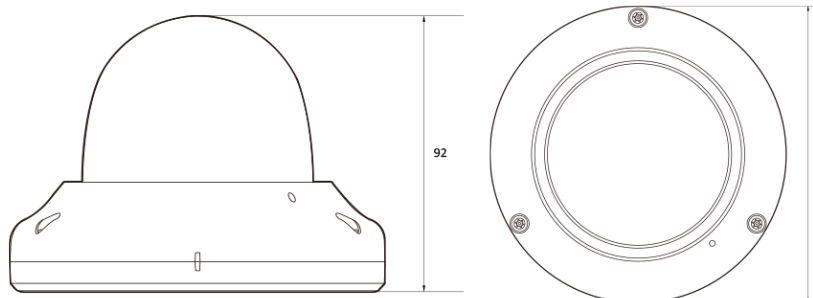

## Specification

### Video

Image Sensor	1/2.8" 8.6M CMOS
Channels	1
Total Pixel	3864(H) X 2228(V)
Max Resolution	3840(H) X 2160(V)
MIN. Illumination	COLOR: 0.12Lux BW: 0Lux with IR
Only installer Video Output	1 [CVBS 1.0V p-p (75Ω)]
S/N(signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan

### Lens

Focal Length	2.8mm 4.0mm 6.0mm
Aperture	F2.0
Lens Type	Fixed
IRIS Type	Auto Exposure
Horizontal Angle	2.8mm D:123.3°, H:105.4°, V:56.3° 4.0mm D:99.2°, H:85.8°, V:48.6° 6.0mm D:63.5°, H:54.6°, V:30.1°
Pan / Tilt / Zoom	Zoom :Fixed

### Operational

Shutter Speed	Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10)
Auto Gain Control (AGC)	Auto
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range (WDR)	WDR(2x)
Dynamic Range	120dB or above
LEDs	H2IR
LED Distance	70ft(22m)
Privacy Zone	Yes
Function	Motion-Detection Mirror&Flip

### Intelligent Video Analytic

AI Intelligent Video Analytic	No
-------------------------------	----

Encoder (video & audio)

Video Compression	H.264 H.265 MJPEG
Support Resolution	H.265 : 3840x2160/2560x1440/1920x1080/1280x720/640x480/640x360/352x288/352x240 H.264 : 3840x2160/2560x1440/1920x1080/1280x720/640x480/640x360/352x288/352x240 MJPEG : 1920x1080/1280x720/800x600/768x432/704x576/704x480/640x480/640x360/352x288/352x240
Intelligent Codec	Yes
Multiple Profile Streaming Performance	Triple Streaming(3rd Only MJPEG)
Video BitRate	100Kbps~25Mbps
Bitrate Control	Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth)
Video Bitrate extra comment	Multi-rate for Preview and Recording
Audio Compression	G.711 ulaw
Special Feature	Dynamic ROI(Region of Interest)

I/O & Event

Audio In / Out	1 Line Input[1.0Vrms, 3K ohm]/1 Line Output
Alarm In / Out	1 Line/1 Line
Mic	No
Event Trigger	Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection
Event Notification	FTP E-Mail Alarm Out SD Card

Network

Ethernet	RJ45(1000Base-T(1Gbps))
Protocol	TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF
Security	HTTPS(SSL) IP filtering 802.1x Digest Authentication
Application Programming I/F	CGI API ONVIF
Web viewer	MS Edge® Google Chrome®
Video management software (VMS)	DW Spectrum® IPVMS
Support languages	English Korean Japanese
Edge storage	Micro SD Micro SDHC Micro SDXC
SD Card Socket	1

Electrical

Power Requirement	Adaptor is not included DC12V PoE IEEE 802.3af Class3
Power consumption	DC Max: 10W PoE Max: 13W









Environmental

Operating Temperature	-20°C ~ 50°C
Cold Start	No
Operating Humidity	10-90% RH(Non-Condensing)
Vandal Proof Casing	IK10
IP Rating	IP67
Other Certification	FCC CE ROHS

Mechanical

Housing Model	VD13
Housing	Outdoor Dome
Material	Aluminum-Die Casting
Color	White
Dimensions (W x D x H)	125mm 92mm
Weight	0.52kg

Compatible Accessories

 <p><b>BR09</b> Inceiling Bracket</p>	 <p><b>BJC11</b> JUNCTION BRACKET</p>	 <p><b>BC10 NPT</b></p>	 <p><b>GP02</b> Gang Bracket</p>
 <p><b>BJC03</b> Junction Bracket</p>	 <p><b>BW10</b> Wall Bracket</p>	 <p><b>BC10</b> Ceiling Bracket</p>	 <p><b>BJC09</b> Wall Junction Bracket</p>



**BP01**

Pole Mount Bracket



**BCO01**

Corner Mount Bracket