

# 8M HD Analog IR Bullet

CBT1-28-RS

## Features


---

- Analog High Definition Universal over Coax Technology
- Starlight Super Low Light Technology
- 1/1.8" CMOS Sensor
- Max 2160P Resolution at 15/12.5fps
- Wide Dynamic Range (WDR)
- Smart IR™ with Intelligent Camera Sync. 100ft Range
- Smart DNR™ 3D Digital Noise Reduction
- Highlight Masking Exposure (HME)
- True Day/Night Mechanical IR Cut Filter
- Programmable Privacy Zones
- Auto Gain Control (AGC)
- Back Light Compensation (BLC)
- Dynamic Range Compressor (DRC) Reveals Low Light Detail
- Auto White Balance (AWB)
- IP67 Certified (Weather Resistant)
- OSD Control via Coax Cable using UTC



## Dimension (mm)

---

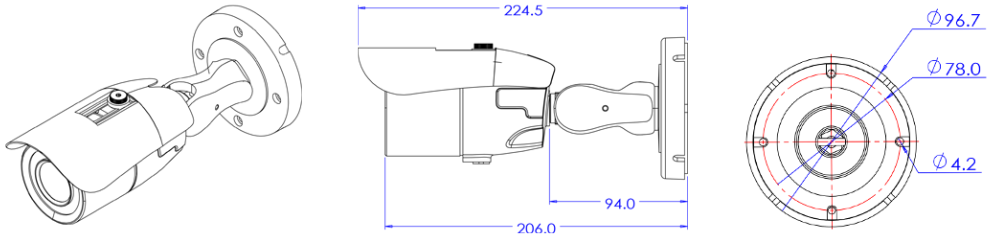

## Specification

### Video

Image Sensor	1/2.8" 8M CMOS
Num of Channels	1
Total Pixel	3864(H) x 2228(V)
Active Pixel	3864(H) x 2176(V)
Max Resolution	3840(H) x 2160(V)
MIN. Illumination	Color(at Day) : 0.1Lux (F1.6, 30IRE) B/W(at Night) : 0Lux(With IR)
Video Output	AHD or TVI or CVI or CVBS
Only installer Video Output	CVBS
Signal Technology	Max 8.0 Megapixel Universal
Synchronization	Internal
Scanning Mode	Progressive Scan

### Lens

Focal Length	2.8mm 4.0mm 6.0mm
Aperture	F1.6
Lens Type	Fixed
IRIS Type	Auto Exposure

### Operational

Shutter Speed	1/30(25) - 1/30,000 Slow Shutter (OFF-x32)
Auto Gain Control (AGC)	Yes
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	2D/3D DNR
Wide Dynamic Range (WDR)	LINE WDR
Dynamic Range	120dB or above
LEDs	20IR
LED Distance	100ft
Gamma	0.5
Function	Motion Detection Privacy Zone White Balance Backlight Mirror & Flip

### I/O & EVENT

Audio In / Out	No
Alarm In / Out	No
UTC Built-in	UTC

Electrical

Power Requirement	DC12V Voltage DC12V
Power consumption	DC(LED OFF) :3W (250mA) DC(LED ON) : 4.2W (352mA)

Environmental

Operating Temperature	-20°C ~ 50°C
Cold Start	No
Operating Humidity	Less than 90%(Non-Condensing)
IP Rating	IP66
Other Certification	FCC CE ROHS

Mechanical

Housing Model	BT1
Housing	Outdoor Bullet
Material	Aluminum-Die Casting
Color	Dark Gray
Dimensions (W x D x H)	224.5mm 96.7mm 96.7mm
Weight	0.65

## Compatible Accessories



**BJC07**

Junction Bracket




**BJC01**

Junction Bracket



**BP01**

Pole Mount Bracket



**BCO01**

Corner Mount Bracket