CPRO
DIGITAL SURVEILLANCE SYSTEMS

8M HD Analog IR Turret

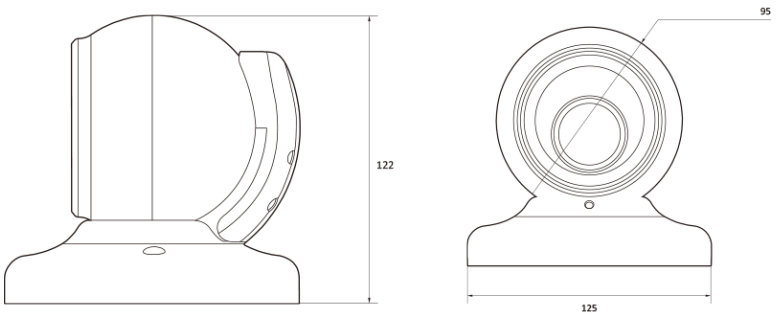
CVD2-28-RS

Features



- Analog High Definition Universal over Coax Technology
- Starlight Super Low Light Technology
- 1/1.8" CMOS Sensor
- Max 2160P Resolution at 15/12.5fps
- Wide Dynamic Range (WDR)
- MFZ P-Iris Lens from 3.6~10mm
- Smart IR™ with Intelligent Camera Sync. 80ft Range
- Smart DNR™ 3D Digital Noise Reduction
- Highlight Masking Exposure (HME)
- True Day/Night Mechanical IR Cut Filter
- Programmable Privacy Zones
- Auto Gain Control (AGC)
- Back Light Compensation (BLC)
- Dynamic Range Compressor (DRC) Reveals Low Light Detail
- Auto White Balance (AWB)
- IP67 Certified (Weather Resistant)
- OSD Control via Coax Cable using UTC

Dimension (mm)


122
95
125

CPRO
DIGITAL SURVEILLANCE SYSTEMS

Specification

Video	
Image Sensor	1/1.8” 8M CMOS
Num of Channels	1
Total Pixel	3952(H) x 2320(V)
Active Pixel	3864(H) x 2176(V)
Max Resolution	3840(H) x 2160(V)
MIN. Illumination	Color(at Day) : 0.09Lux (F1.5, 30IRE) B/W(at Night) : 0 lux(With IR)
Video Output	AHD or TVI or CVI or CVBS
Only installer Video Output	No
Signal Technology	Max 8.0 Megapixel Universal
Synchronization	Internal
Scanning Mode	Progressive Scan

Lens	
Focal Length	3.6~10mm
Aperture	F1.5
Lens Type	Motorized
IRIS Type	P-IRIS
Horizontal Angle	D:112.9°, H:98.4°, V:54.6°(Wide) D:52.3°, H:45.7°, V:25.9°(Tele)

Operational	
Shutter Speed	1/30(25) - 1/30,000 Slow Shutter (OFF-x32)
Auto Gain Control (AGC)	Yes
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	2D/3D DNR
Wide Dynamic Range (WDR)	LINE WDR
Dynamic Range	120dB or above
LEDs	H2IR
LED Distance	80ft
Gamma	0.5
Function	Motion Detection Privacy Zone White Balance Backlight Mirror & Flip

I/O & EVENT	
Audio In / Out	No
Alarm In / Out	No

CPRO
DIGITAL SURVEILLANCE SYSTEMS

I/O & EVENT	
UTC Built-in	UTC
UTP Built-in	No

Electrical	
Power Requirement	DC12V / AC24V Dual Voltage DC12V AC24V
Power consumption	DC(LED OFF) :5.517W (460mA) DC(LED ON) : 8.98W (748mA) AC(LED OFF) :5.06W (358mA) AC(LED ON) :8.03W (552mA)

Environmental	
Operating Temperature	-20℃ ~ 50℃
Cold Start	No
Operating Humidity	Less than 90%(Non-Condensing)
IK Rating	IK10
IP Rating	IP67
Other Certification	FCC CE ROHS

Mechanical	
Housing Model	VD2
Housing	Outdoor Turret
Material	Aluminum-Die Casting
Color	White
Dimensions (W x D x H)	125mm 122mm
Weight	0.51

Compatible Accessories



BJC11
JUNCTION BRACKET



BC10 NPT



GP02
Gang Bracket



BJC03
Junction Bracket

CPRO
DIGITAL SURVEILLANCE SYSTEMS



BW10

Wall Bracket



BC10

Ceiling Bracket



BJC09

Wall Junction Bracket



BP01

Pole Mount Bracket



BCO01

Corner Mount Bracket