**CPRO**
**DIGITAL SURVEILLANCE SYSTEMS**

# AI 5M IP IR Wide Mini Bullet


NBI5-E5L-R

## Features

- 5MP AI Wide view Camera
- Supports Intelligent Video Analysis Events (Intrusion, Dwell, Counting Line)
- Maximum Resolution 2592 (H) X 1944 (V) / 30fps
- Horizontal Field of View 124 degrees / Fixed Lens
- Day & Night(ICR)/IR Visibility up to 23 meters
- Backlight Compensation (WDR)
- SD/SDHC/SDXC Memory Slot
- PoE IEEE 802.3af/Class3
- IP67/IK10



## Dimension (mm)

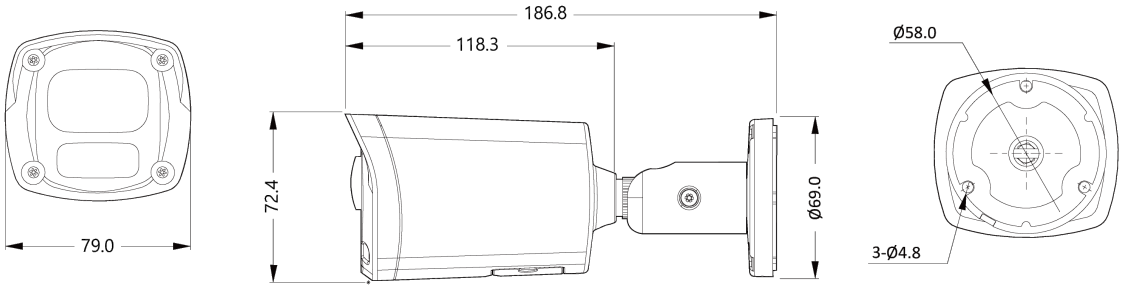

**CPRO**
**DIGITAL SURVEILLANCE SYSTEMS**

# Specification

| Video | |
|---|---|
| Image Sensor | 1/2.8” 5.17M(STV2) CMOS |
| Channels | 1 |
| Total Pixel | 2608(H) X 1984(V) |
| Max Resolution | 2592(H) X 1944(V) |
| MIN. Illumination | COLOR: 0.05Lux<br>BW: 0Lux with IR |
| Only installer Video Output | 1 [CVBS 1.0V p-p (75Ω)] |
| S/N(signal/noise) Ratio | 50dB |
| Scanning Mode | Progressive Scan |

| Lens | |
|---|---|
| Focal Length | 2.26mm |
| Aperture | F1.6 |
| Lens Type | Fixed |
| IRIS Type | Auto Exposure |
| Horizontal Angle | D : 148°, H : 124°, V : 94° |
| Pan / Tilt / Zoom | Zoom :Fixed |

| Operational | |
|---|---|
| Shutter Speed | Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10) |
| Auto Gain Control (AGC) | Auto |
| Day & Night | TDN (True Day & Night) |
| Digital Noise Reduction | 3D DNR |
| Wide Dynamic Range (WDR) | WDR(2x) |
| Dynamic Range | 120dB or above |
| LEDs | H2IR |
| LED Distance | 75ft(23m) |
| Privacy Zone | Yes |
| Function | Motion-Detection Mirror&Flip Auto White Balance |

| Intelligent Video Analytic | |
|---|---|
| AI Intelligent Video Analytic | Yes |
| Video analytics | Intrusion Detection Dwell Filter Counting Lines Metadata |

**CPRO**
**DIGITAL SURVEILLANCE SYSTEMS**

| Encoder (video & audio) | |
|---|---|
| Video Compression | H.264 H.265 MJPEG |
| Support Resolution | H.265 : 2592x1944/2560x1440/1920x1080/1280x720/704x480/640x480/640x360/352x240<br>H.264 : 2592x1944/2560x1440/1920x1080/1280x720/704x480/640x480/640x360/352x240<br>MJPEG : 1280x720/768x432/704x480/640x480/640x360/352x240 |
| Intelligent Codec | Yes |
| Multiple Profile Streaming Performance | Triple Streaming(3rd Only MJPEG) |
| Video BitRate | 100Kbps~25Mbps |
| Bitrate Control | Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth) |
| Video Bitrate extra comment | Multi-rate for Preview and Recording |
| Audio Compression | No |
| Special Feature | Dynamic ROI(Region of Interest) |

| I/O & Event | |
|---|---|
| Audio In / Out | No |
| Alarm In / Out | No |
| Mic | No |
| Event Trigger | Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection |
| Event Notification | FTP E-Mail SD Card |

| Network | |
|---|---|
| Ethernet | RJ45 (10/100Base-T) |
| Protocol | TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF |
| Security | HTTPS(SSL) IP filtering 802.1x Digest Authentication |
| Application Programming I/F | CGI API ONVIF |
| Web viewer | MS Edge® Google Chrome® |
| Support languages | English Korean Japanese Vietnamese |
| Edge storage | Micro SD Micro SDHC Micro SDXC |
| SD Card Socket | 1 |

| Electrical | |
|---|---|
| Power Requirement | Adaptor is not included DC12V PoE IEEE 802.3af Class3 |
| Power consumption | DC Max: 5.4W PoE Max: 6.5W |

| Environmental | |
|---|---|
| Operating Temperature | -30℃ ~ 60℃ |
| Cold Start | No |

**CPRO**
**DIGITAL SURVEILLANCE SYSTEMS**

| Environmental | |
|---|---|
| Operating Humidity | 10-90% RH(Non-Condensing) |
| Vandal Proof Casing | IK10 |
| IP Rating | IP67 |
| Other Certification | FCC CE ROHS |

| Mechanical | |
|---|---|
| Housing Model | BI5 |
| Housing | Outdoor Bullet |
| Material | Aluminum-Die Casting |
| Color | White |
| Dimensions (W x D x H) | 79mm<br>184mm<br>72.6mm |
| Weight | 0.782kg |