CPRO
DIGITAL SURVEILLANCE SYSTEMS

5M HD Analog IR Mini Bullet


CBI2-25-R

Features

-



Dimension (mm)

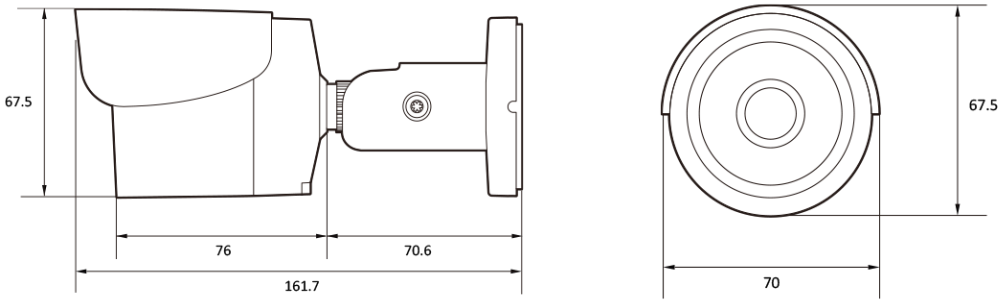

CPRO
DIGITAL SURVEILLANCE SYSTEMS

Specification

Video	
Image Sensor	1/2.8” 5M CMOS
Num of Channels	1
Total Pixel	2704(H) x 2104(V)
Active Pixel	2608(H) x 1960(V)
Max Resolution	2592 x 1944
MIN. Illumination	Color(at Day) : 0.16Lux (F2.0, 30IRE) B/W(at Night) : 0 lux(With IR)
Video Output	AHD or TVI or CVI or CVBS
Only installer Video Output	No
Signal Technology	Max 5M Megapixel Universal
Synchronization	Internal
Scanning Mode	Progressive Scan

Lens	
Focal Length	4.0mm
Aperture	F2.0
Lens Type	Fixed
IRIS Type	Auto Exposure
Horizontal Angle	D:106°, H:82°, V:60°

Operational	
Shutter Speed	1/30(25) - 1/30,000 Slow Shutter (OFF-x32)
Auto Gain Control (AGC)	Yes
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	2D/3D DNR
Wide Dynamic Range (WDR)	Double Scan WDR
Dynamic Range	120dB or above
LEDs	H2IR
LED Distance	70ft
Gamma	0.5
Function	Motion Detection Privacy Zone White Balance Backlight Mirror & Flip

I/O & EVENT	
Audio In / Out	No
Alarm In / Out	No

CPRO
DIGITAL SURVEILLANCE SYSTEMS


I/O & EVENT	
UTC Built-in	UTC
UTP Built-in	No

Electrical	
Power Requirement	DC12V Voltage DC12V
Power consumption	DC(LED OFF) :2W (176mA) DC(LED ON) : 3.9W (333mA)

Environmental	
Operating Temperature	-20℃ ~ 50℃
Cold Start	No
Operating Humidity	Less than 90%(Non-Condensing)
IP Rating	IP67
Other Certification	FCC CE ROHS

Mechanical	
Housing Model	BI2
Housing	Outdoor Bullet
Material	Aluminum-Die Casting
Color	Dark Gray
Dimensions (W x D x H)	163mm 67.5mm
Weight	0.44kg

Compatible Accessories



BJC07
Junction Bracket



BP01
Pole Mount Bracket



BCO01
Corner Mount Bracket