CPRO
DIGITAL SURVEILLANCE SYSTEMS

2M HD Analog LPR IR Bullet


CBT4-12-RL

Features

-



Dimension (mm)

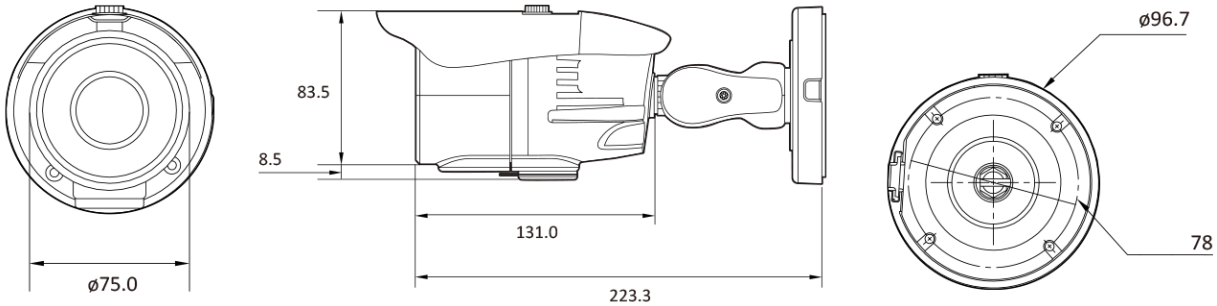

CPRO
DIGITAL SURVEILLANCE SYSTEMS

Specification

Video	
Image Sensor	1/3” 2M CMOS
Num of Channels	1
Total Pixel	1956(H) x 1266(V)
Active Pixel	1944(H) x 1092(V)
Max Resolution	1920 X 1080
MIN. Illumination	B/W(All Day) : 0 lux(With IR)
Video Output	HD-A HD-TVI HD-CVI CVBS
Only installer Video Output	CVBS
Signal Technology	Max 2M Megapixel Universal
Synchronization	Internal
Scanning Mode	Progressive Scan

Lens	
Focal Length	6~50mm
Aperture	F1.6
Lens Type	Vari-Focal
IRIS Type	P-IRIS
Horizontal Angle	D:60.6°, H:51.6°, V:28.1°(Wide) D:7.4°, H:6.3°, V:3.7°(Tele)

Operational	
Shutter Speed	1/30(25) - 1/30,000 Slow Shutter (OFF-x32)
Auto Gain Control (AGC)	Yes
Day & Night	No
Digital Noise Reduction	2D/3D DNR
Wide Dynamic Range (WDR)	No
Dynamic Range	No
LEDs	H2IR
LED Distance	60ft
Gamma	0.75
Function	Privacy Zone White Balance Backlight Mirror & Flip

I/O & EVENT	
Audio In / Out	1[1.0Vms, 3K ohm]/1
Alarm In / Out	1/1
RS485	PELCO D

CPRO
DIGITAL SURVEILLANCE SYSTEMS

I/O & EVENT	
UTC Built-in	UTC

Electrical	
Power Requirement	DC12V / AC24V Dual Voltage DC12V AC24V
Power consumption	DC(LED ON) : 6.12W AC(LED ON) :5.7W


Environmental	
Operating Temperature	-20℃ ~ 50℃
Operating Humidity	Less than 90%(Non-Condensing)
IP Rating	IP66
Other Certification	FCC CE ROHS

Mechanical	
Housing Model	BT4
Housing	Outdoor Bullet
Material	Aluminum-Die Casting
Color	Dark Gray
Dimensions (W x D x H)	264mm 96.7mm 96.7mm
Weight	0.8kg

Compatible Accessories



BJC13
JUNCTION BRACKET



BJC07
Junction Bracket



BJC01
Junction Bracket



BP01
Pole Mount Bracket

CPRO
DIGITAL SURVEILLANCE SYSTEMS



BCO01

Corner Mount Bracket